

10/506989 507, 541

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
24 December 2003 (24.12.2003)

PCT

(10) International Publication Number  
WO 03/106750 A1(51) International Patent Classification<sup>7</sup>: D05B 69/18

(21) International Application Number: PCT/GB03/01842

(22) International Filing Date: 1 May 2003 (01.05.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0213418.7 12 June 2002 (12.06.2002) GB

(71) Applicant and

(72) Inventor: SHAD, Philip [GB/GB]; 53 Oakfield Close,  
Potters Bar, Hertfordshire EN6 2BE (GB).(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,  
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,  
UZ, VC, VN, YU, ZA, ZM, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).**Declaration under Rule 4.17:**


— of inventorship (Rule 4.17(iv)) for US only

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SEWING MACHINE HAVING A WIRELESS SWITCH AND INDEPENDENT CONTROLLER

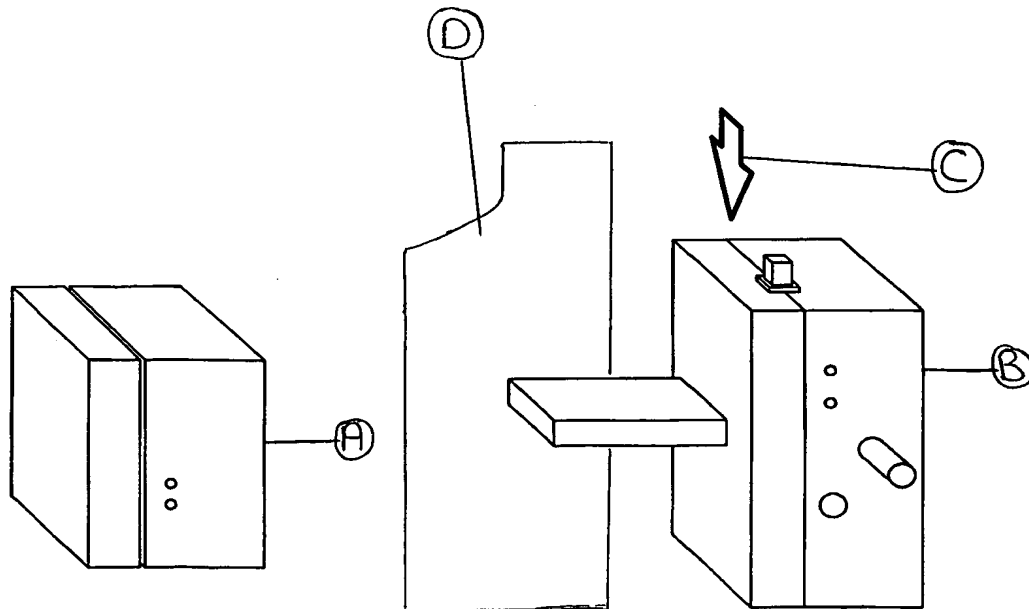

(57) Abstract: A wireless transmitter may be used to produce coded digital signals for operating the control switches of a plurality of sewing machines. The transmitter has a rechargeable battery which can be charged on connecting the transmitter to a receiver B on the body D of a sewing machine. A strap attached to the transmitter incorporates an aerial wire.

WO 03/106750 A1

TITLE;  
-----

SEWING MACHINE HAVING A WIRELESS SWITCH AND INDEPENDANT CONTROLLER.

BACK GROUND OF THE INVENTION.

#### 1. FIELD OF INVENTION.

THE PRESENT INVENTION RELATES TO A SEWING MACHINE AND MORE PARTICULARLY TO A SEWING MACHINE HAVING A WIRELESS SWITCH AND A INDEPENDANT OPERATING SPEED CONTROLLER ATTACHED TO THE MACHINE BODY OF THE SEWING MACHINE.

THERE ARE SAFETY INSTANCES WHEN A SEWING MACHINE NEEDS TO BE OPERATED BY REMOTE CONTROL FOR EXAMPLE THE REMOTE CONTROL ELIMINATES THE CABLE BETWEEN THE TRANSMISSION SWITCH AND THE MACHINE BODY. A SEWING MACHINE WITH THE ABOVE MENTIONED SWITCH CAN ALSO BE USED WHERE A PERSON HAS RESTRICTED MOVEMENT. THE TRANSMITTER SWITCH MAY BE HAND HELD, PLACED ON THE FLOOR, ATTACHED TO THE ARM, LEG, WRIST, ENABLING THE OPERATOR TOO GUIDE THE MATERIAL WHEN TRANSMITTING. THE WIRELESS SWITCH IS PORTABLE. THE INDEPENDANT CONTROLLER WHICH IS ATTACHED TO THE MACHINE BODY CAN LIMIT THE OPERATING SPEED OF THE MACHINE. THIS MAY BE DONE MANUALLY. THIS CAN ALSO PREVENT INDUSTRIAL OPERATORS SEWING TOO FAST AND REDUCING THE QUALITY OF THE SEAMS. IT CAN ALSO BE USED WHENEVER SEVERAL SEWING MACHINES WORK SIMULTANEOUSLY, AND ONE SINGLE OPERATOR CAN USE THE REMOTE WIRELESS ON/OFF SWITCH BY FIRST SELECTING THE OPERATING MOTOR SPEED ON THE MACHINE BODY AND THEN ACTIVATING THE WIRELESS SWITCH TO START THE SEWING MACHINE.

#### 2. DESCRIPTION OF RELATED ART.

PATENT USA 4 976 552/1990. DESCRIBES A REMOTE CONTROL SEWING MACHINE, WHERE THE CONNECTION BETWEEN THE TRANSMITTER AND THE RECEIVER IS ENSURED BY A OPTICAL SIGNAL. IN THE TECHICAL SOLUTION DESCRIBED, THE ANALOGUE SIGNAL PICKED UP FROM A VARIABLE RESISTOR, WHICH CORRESPONDS TO THE SEWING MACHINE FOOT CONTROLLER IS APPLIED TO AN ANALOGUE DIGITAL CONVERTER, AND THE NUMERICAL SIGNAL OBTAINED IS MODULATED BY A CONVEYOR WHICH CONNECTS TO AN OPTICAL TRANSMITTER. THE RECEIVER OBTAINS, AFTER DEMODULATION, A SIGNAL WITH VARIABLE AMPLITUDE, WHICH CONTROLS THE SEWING MACHINE MOTOR, IN THIS WAY, BY ACTIVATING THE VARIABLE RESISTOR OF THE REMOTE CONTROL THE MOTOR ROTATION SPEED IS ACTIVATED AS WELL.

THE SOLUTION DESCRIBED ABOVE IS COMPLICATED AS IT NEEDS A NUMERICAL ANALOGUE CONVERTER IN THE COMMAND UNIT, AND BECAUSE IT USES LIGHT TO TRANSMIT INFORMATION, AND POSES DIFFICULTIES FOR THE SIMULTANEOUS OPERATION OF SEVERAL MACHINES, AND THEREFOR THIS SOLUTION HAS A LIMITED APPLICATION.

PATENT JP 59 050 792

TRIES TO OVERCOME THIS SHORTCOMING AND USES RADIO FREQUENCY. IN THIS CASE, THE COMMAND SIGNAL OBTAINED ON A VARIABLE RESISTOR (WHICH CORRESPONDS TO THE SEWING MACHINE FOOT CONTROLLER) MODULATES IN IMPULSES A RADIO FREQUENCY CONVEYOR WITH A RECTANGULAR SIGNAL WHOSE FREQUENCY IS DEPENDENT ON THE POSITION OF THE FOOT CONTROLLER; AFTER DEMODULATION, THE RECEIVER OBTAINS A RECTANGULAR SIGNAL WHICH, AFTER HAVING BEEN AMPLIFIED, IS APPLIED TO A TILTABLE NON-STABLE CIRCUIT. THE RECTANGULAR SIGNAL, WHICH HAS A VARIABLE FREQUENCY, IS APPLIED TO A LOWER FILTER, WHICH CONVERTS THE VARIABLE SIGNAL OF THE FREQUENCY INTO A VARIABLE TENSION SIGNAL. THIS SIGNAL CONTROLS AN OPTIC CONNECTOR, AND ONCE PROCESSED, THE OBTAINED SIGNAL CONTROLS THE ROTATION OF THE MOTOR. THE SOLUTION DESCRIBED ABOVE ALLOWS THE OPERATION OF SEVERAL SEWING MACHINES BY A SINGLE REMOTE CONTROL BUT IT IS SENSITIVE TO INTERFERENCE RADIATION WHICH IS GENERATED BY THE SEWING MACHINE MOTORS.

PATENT USA 5 247 449/1993

TRIES TO OVERCOME THIS SHORTCOMING AND USES RADIO FREQUENCY. IN THIS CASE, THE COMMAND SIGNAL IS PICKED UP FROM A VARIABLE RESISTOR (WHICH CORRESPONDS TO THE SEWING MACHINE FOOT CONTROLLER). AN ANALOGUE DIGITAL CONVERTER IS APPLIED, AND THEN AFTER THE FREQUENCY MODULATION (FM) OF A RADIO-FREQUENCY SIGNAL, THE SIGNAL IS EMITTED; AT RECEPTION, AFTER DEMODULATION, IN A CONTROL BLOCK, THE SIGNAL UNDERGOES A REVERSE DIGITAL ANALOGUE CONVERSION AND THE VARIABLE SIGNAL CONTROLS THE MOTOR ROTATION. A REPLACEMENT BATTERY IS USED. THE MACHINE WILL STOP OPERATING WHEN THE BATTERY HAS REACHED A CERTAIN LEVEL OF POWER SOURCE TO INDICATE TO THE OPERATOR THAT THE BATTERY NEEDS TO BE REPLACED OTHERWISE THE MACHINE WILL MALFUNCTION BY RUNNING CONTINUALLY AND CANNOT BE STOPPED AND THE SPEED CANNOT BE CHANGED BECAUSE THE SIGNAL CANNOT BE TRANSMITTED.

AS IT USES A RADIO FREQUENCY SIGNAL AS A CONVEYOR, THIS TECHNICAL SOLUTION ALLOWS THE OPERATION OF SEVERAL SEWING MACHINES BY A SINGLE REMOTE CONTROL, BUT IT REMAINS COMPLICATED: IT NEEDS CODING AND DECODING OF THE INFORMATION TO THE SIGNAL MODULATION AND DEMODULATION, MOREOVER, EVEN IF THE FREQUENCY MODULATION (FM) IS USED TO TRANSMIT THE COMMAND SIGNAL, IT IS POSSIBLE THAT VARIOUS RADIO FREQUENCY SIGNALS- AND HERE WE HAVE THE INTERFERENCE SIGNALS GENERATED BY THE SEWING MACHINE MOTOR- WILL OVERLAP AND DISTURB THE USEFUL SIGNAL; THE USE OF FREQUENCY MODULATION REQUIRES THE USE OF A RELATIVELY WIDE BAND, AND THEREFORE THERE IS MORE INTERFERENCE WITH THE RECEIVED SIGNAL, EVEN WITH THE USE OF (ADDITIONAL) CODING/DECODING OPERATIONS, IT IS POSSIBLE TO DISTURB THE RECEIVED SIGNAL, AND IMPLICITLY THE FUNCTIONING OF THE SEWING MACHINE.

TO THE REPLACEMENT BATTERY IT IS IMPERATIVE FOR THE OPERATOR TO SEE THE MESSAGE ON THE MACHINE TO PREPARE FOR BATTERY REPLACEMENT OTHERWISE THE SAFETY OF THE OPERATOR MAY BE AT RISK DUE TO MALFUNCTION OF SEWING MACHINE AND LOSS OF GARMENT PRODUCTION.

## SUMMARY OF THE INVENTION

IT IS AN OBJECT OF THE PRESENT INVENTION TO PROVIDE A SEWING MACHINE HAVING A WIRELESS SWITCH AND A INDEPENDANT CONTROLLER ATTACHED TO THE MACHINE BODY PROVIDING A SEWING MACHINE SUBSTANTIALLY FREE FROM INTERFERENCE FROM A RADIO WAVE SIGNAL FROM OTHER TRANSMITTERS AND TO PREVENT THE MACHINE MALFUCTION BY RUNNING CONTINUALLY AND CANNOT BE STOPPED AND THE MACHINE SPEED CANNOT BE CHANGED.

IT IS ANOTHER OBJECT OF THE PRESENT INVENTION TO PROVIDE A RECHARGABLE BATTERY IN A WIRELESS SWITCH SO THAT CONTINUOUS DATA TO RUN THE SEWING MACHINE AND THEN THE MACHINE WILL STOP IF THE DATA FAILS AND WHEN THE RECHARGABLE BATTERY RUNS OUT OF POWER THE MACHINE WILL NOT START AND ANYTHING THAT BREAKS THE TRANSMISSION THE MACHINE WILL AUTOMATIC STOP.

## BRIEF DESCRIPTION OF THE DRAWINGS.

FIG.1 IS A DIAGRAM ILLUSTRATING THE FOLLOWING(A)OPERATE LED.(B)POWER LED.(C)SPEED CONTROL.(D)CALIBRATION FOR THE MOTOR.(E)RECHARGING POINT.(F)CONNECTOR TO THE SEWING MACHINE.(G)DIL SWITCHES FOR CODING.(H)FUSE.(J)LID OF RECEIVER BOX.(K)RECEIVER BOX.

FIG.2 IS A DIAGRAM ILLUSTRATING THE FOLLOWING(A)BATTERY CHARGER LED.(B)OPERATE LED.(C)OPERATING SWITCH AND SPRING.(D)RECHARGE CONNECTOR.(E)DIL SWITCHES FOR CODING.(F)FOUR SPRINGS.(G)TRANSMITTER BOX.(H)LID OF TRANSMITTER BOX.

FIG.3 IS A DIAGRAM ILLUSTRATING THE FOLLOWING(A) TRANSMITTER BOX.(B)RECEIVER BOX.(C)VIEW TO RECHARGE TRANSMITTER BOX.(D)SEWING MACHINE BLOCK.

FIG.4 IS A DIAGRAM ILLUSTRATING THE FOLLOWING(A)BATTERY CHARGER LED.(B)THE BATTERY RECHARGING POSITION OF THE TRANSMITTER BOX AND RECEIVER BOX.

FIG.5 IS A DIAGRAM ILLUSTRATING THE FOLLOWING(A)A STRAP ATTACHED TO TRANSMITTER BOX.(B)A STRAP ATTACHED TO TRANSMITTER BOX PROVIDING INSULATION FOR WIRE.(C)WIRE ALONG THE FULL LENGHT OF THE STRAP.(D)DC POWER RECHARGABLE POWER SOCKET.

FIG.6 IS A DIAGRAM ILLUSTRATING THE FOLLOWING(A)THE OPPOSITE SIDE VIEW OF FIGURE(1).(A) IEC INLET MAINS CONNECTION.(B)RECEIVER BOX.(C)CONNECTOR TO SEWING MACHINE.(D)LID OF RECEIVER BOX.

FIG.7 IS A SCHEMATIC ELECTRIC CIRCUIT OF THE TRANSMITTER.

FIG.8 IS A SCHEMATIC ELECTRIC CIRCUIT OF THE RECEIVER.

THEIR IS A STRAP FIG 5.(A) ATTACHED TO THE TRANSMITTER BOX THAT CONTAINS A INSULATED WIRE(C) TO REACTIVATE A SMALL AMOUNT OF SIGNAL AND TRANSMITS FROM A RESTRICTED LOCATION OR AREA WHEN THE CIRCUIT IS MOSTLY OBSURED BY THE BODY AND CLOTHING THIS ENSURES THAT EACH INDIVIDUAL SEWING MACHINE OF ONE OR MORE BEING OPERATED IN A CONFINED WORKING AREA OF A MINIMUM DISTANCE OF 30cms APART AND 30cms IN FRONT OF THE SEWING MACHINE FROM THE FIRST SEWING MACHINE TO THE NEXT MACHINE FOR OPERATIONAL USE AND THERE AFTER TO THE SAME DISTANCE AND FRONTAGE APART FOR THE USE IN A SCHOOL CLASSROOM, SEWING DESIGN SAMPLE ROOM, GARMENT FACTORY, IN THE HOME, AND ANY SUITABLE WORKING ENVIRONMENT, BEING TRANSMITTED BY ONE WIRELESS SWITCH OR MORE THAN ONE TRANSMITTED SWITCHES BEING ACTIVATED FOR ONE SEWING MACHINE OR MORE THAN ONE MACHINES SIMULTANEOUSLY USED, AND SEWING MACHINES BEING RAMDERLEY TRANSMITTED IN VARIOUS START AND STOP SEWING OPERATIONS BY ONE INDIVIDUAL OPERATOR AND OR A GROUP OF INDIVIDUAL OPERATORS USING ALLOCATED SEWING MACHINES FOR THEIR SEWING REQUIREMENTS, FOR EXAMPLE STITCHING THE SEAMS OF CURTAINS.

THEIR IS FOR A SEWING MACHINE HAVING THE USE OF THE MICOPROCESSER.FIG.7 AND FIG.8. THAT ENABLES TO USE A DITAL CODED TRANSMISSION GIVEN A LARGE NUMBER OF WIRELESS SWITCHES THE FREQUENCY REFERENCE OF THE TRANSMITTER IS A SINGLE CRYSTAL OR A SAW DEVICE AND DOES NOT REQUIRE MULTABLE FREQUENCIES MICO PROCESSER IN THE TRANSMITTER THAT ENABLES TO PUT OUT A PSEUDO-RANDOM TO AVOID INTERFERENCE FROM ADJUSTED UNITS USING AMPLITUDE MODULATION.

THEIR IS FOR A SEWING MACHINE WHILE BEING TRANSMITTED BY THE WIRELESS SWITCH HAVING A SECOND WIRELESS SWITCH THAT CAN BE CHARGED ON THE RECEIVER BOX ATTACHED TO THE SEWING MACHINE.THE SECOND WIRELESS SWITCH IS DISABLED WHEN THERE IS A 5 VOLT SUPPLY PRESENT TO RECHARGE THE BATTERY.THE RECEIVER BOX SUPPLIES 5 VOLTS FOR THE TRANSMITTER TO RECHARGE.THIS ALSO AVOIDS A INDEPENDANT POWER BATTERY CHARGER.THIS PROVIDES CONTINOUS BATTERY CHARGING WHILE THE MACHINE IS IN USE PROVIDING 24 HOURS OF OPERATING USE OF THE MACHINE MOST USEFUL IN A GARMENT FACTORY FOR CONTINOUS PRODUCTION.

THE RECEIVER BOX FIG.1(B) POWER LED.THE TRANSMITTER BOX FIG.(2) (A) BATTERY CHARGER LED.

USING ONE TRANSMITTER SWITCH AND RECEIVER FOR RECHARGING IS UNPLUGGED FROM SEWING MACHINE AND PLUGGED WITH THE IEC MAINS SUPPLY LEAD INTO THE MAINS SOCKET.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS.

NOW, EMBODIMENTS OF A SEWING MACHINE OF THE PRESENT INVENTION WILL BE DESCRIBED IN DETAIL HEREINBELOW WITH REFERENCE TO THE ACCOMPANYING DRAWINGS.

FIG.7 IS A SCHEMATIC ELECTRIC CIRCUIT OF THE RC2002 TRANSMITTER. A 3.6 VOLT RECHARGABLE BATTERY, BT1, POWERS THE TRANSMITTER; THIS CAN BE RECHARGED FROM THE 5 VOLT INPUT ON CN1. THE RECEIVER PLUGS INTO CN1 AND PROVIDES 5 VOLTS DC FOR THIS PURPOSE.

R3 AND R4 PRODUCE A REFERENCE VOLTAGE; THIS IS COMPARED WITH THE BATTERY VOLTAGE, VIA R1, BY THE OP-AMP U1. IF THE BATTERY VOLTAGE IS LESS THAN 4V THEN THE OUTPUT OF U1 BECOMES POSITIVE AND CHARGES THE BATTERY. THE CHARGING CURRENT IS LIMITED TO ABOUT 8mA BY THE OUTPUT RESTRICTIONS INHERENT IN THE OP-AMP AND D1 PREVENTS BACK LEAKAGE FROM THE BATTERY WHEN THE SUPPLY IS DISCONNECTED. R2 IS USED TO PRODUCE A SMALL AMOUNT OF HYSTERESIS IN THE CIRCUIT SUCH THAT THE CHARGING STOPS AT ABOUT 4.2 VOLTS AND WILL NOT START AGAIN UNTIL THE BATTERY VOLTAGE HAS FALLEN TO ABOUT 3.8VOLTS. THE OP-AMP OUTPUT IS ALSO TAKEN VIA R6 TO SWITCH Q1 AND HENCE ILLUMINATES THE LED, D2, TO INDICATE WHEN THE BATTERY IS CHARGING.

WHEN SW1 IS OPERATED POWER IS APPLIED TO IC1 AND ITS ASSOCIATED CIRCUITRY.

IC1 IS A HYBRID-INTEGRATED CIRCUIT CONTAINING BOTH AN INTEGRATED RF TRANSMITTER, REQUIRING MINIMAL EXTERNAL COMPONENTS, AND AN 8-BIT MICROPROCESSOR HAVING SIX IO PINS AND INTERNAL 4MHz CLOCK GENERATOR, WHEN POWERED UP THE SOFTWARE IN THE MICROPROCESSOR READS A 5-BIT CODE FROM THE DIL SWITCH SW2 AND GENERATES A PSEUDO-RANDOMLY SPACED DATA STREAM ON GP5 OUTPUT PIN. THE DATA IS CODED SO AS TO PRODUCE ONE DATA WORD EVERY 2 TO 66ms. EACH WORD CONSISTS OF SIX BITS; ONE START BIT AND 5 DATA BITS DIRECTLY REPRESENTING THE SETTINGS OF SW2. THE START BIT IS A 300us PULSE AND THE DATA BITS ARE 5 WIDTH-MODULATED PULSES WITH A CYCLE LENGTH OF 900us AND A DUTY TIME OF EITHER 300 OR 600us. THE RANDOM TIME GENERATOR IS SEEDED FROM THE 5-BIT CODE AND THUS EACH TRANSMITTER WILL PRODUCE A DIFFERENT RANDOM SEQUENCE. THIS ENSURES THAT THE OUTPUTS OF MORE THAN ONE TRANSMITTER USED SIMULTANEOUSLY PRODUCE ONLY VERY LIMITED INTERFERENCE WITH EACH OTHER. THE DATA SIGNAL IS USED TO SWITCH THE TRANSMITTER OSCILLATOR ON AND OFF THUS PRODUCING A SUPPRESSED CARRIER AMPLITUDE MODULATION (AM) SIGNAL AT THE OUTPUT OF THE TRANSMITTER. THE TRANSMITTER USES A PCB TRACK AS A LOOP ANTENNA TUNED BY C4. FREQUENCY REFERENCE IS PROVIDED BY A CRYSTAL, XI, THIS OSCILLATES AT 13.56MHz AND IS INTERNALLY MULTIPLIED BY 32 TO PRODUCE A CARRIER FREQUENCY OF 433.92MHz. WHEN RECHARGING POWER IS APPLIED TO THE CIRCUIT Q2 IS SWITCHED ON VIA R7 AND THIS IN TURN PULLS THE ENABLE PIN OF THE TRANSMITTER TO GROUND DISABLING THE RF OUTPUT WHEN CHARGING OF THE BATTERY IS TAKING PLACE. C5, C6 AND R11 FORM A LOOP FILTER FOR THE RF OSCILLATOR AND HAVE BEEN SELECTED TO GIVE A FAIRLY FAST OSCILLATOR START-UP TIME. D3 IS POWERED WHENEVER SW1 IS OPERATED AND GIVES A VISUAL INDICATION OF TRANSMITTER OPERATION. C1, C2 AND C3 ARE SUPPLY BYPASS CAPACITORS.

CONTINUATION OF DESCRIPTION OF SHAD RC2002  
TRANSMITTER:

IN ADDITION TO THE LOOP ANTENNA ON THE PCB, AN INSULATED WIRE IS INCORPORATED IN THE ARM STRAP OF THE TRANSMITTER BOX. THIS ABSORBS SOME OF THE RADIATED SIGNAL FROM THE LOOP AND RE-RADIATES THE RF SIGNAL TO ENABLE A BETTER TRANSMISSION WHEN THE CIRCUIT IS MOSTLY OBSCURED BY THE BODY AND CLOTHING.

DESCRIPTION OF SHAD RC2002 RECEIVER  
-----

FIG.8

THE LIVE AND NEUTRAL MAINS INPUTS ARE ON CN1 THESE ARE TAKEN TO TRANSFORMER TF1 TO POWER THE LOW VOLTAGE CIRCUITRY AND VIA L1 AND L2 TO SUPPLY THE SEWING MACHINE LAMP AND THE PHASE ANGLE CONTROL CIRCUIT FOR THE MOTOR. L1 AND L2 PROVIDE MAINS FILTERING TO PREVENT TRANSIENT SPIKES FROM BEING TRANSMITTED BACK DOWN THE MAINS PATH IN ADDITION THE PCB TRACKS AND INTERNAL MACHINE WIRING ARE PROTECTED BY A ONE-AMP HRC FUSE.

DIODES D2 AND D4 FULL-WAVE RECTIFY THE OUTPUT OF TF1 AND THIS IS SMOOTHED BY C2 TO GIVE ABOUT 8VOLTS DC. THE 8 VOLTS IS THEN REGULATED TO 5VOLTS BY THE LOW DROPOUT REGULATOR U2, THIS IS THEN USED TO POWER THE PHASE CONTROL CIRCUIT, MICROPROCESSOR, RADIO RECEIVER MODULE AND IS ALSO TAKEN TO CN3 TO PROVIDE POWER TO RECHARGE THE TRANSMITTER. DIODES D1 AND D3 PRODUCE A FULL WAVE RECTIFIED SIGNAL, WHICH IS THEN TAKEN TO THE PHASE CONTROL CIRCUIT. R5 PROVIDES A SIGNAL DISCHARGE PATH AND THE RECTIFIED SIGNAL IS THEN TAKEN VIA R4 TO THE INPUT OF A SCHMITT TRIGGER INVERTER. THE ZENER DIODE D5 IS USED TO CLIP THE SIGNAL AND PROVIDE OVER VOLTAGE PROTECTION TO U4C. THE OUTPUT OF U4C IS A SET OF POSITIVE PULSES COINCIDING WITH MAINS ZERO CROSSING, THIS IS THEN INVERTED BY U4B TO PROVIDE A POSITIVE GOING PULSE DURING EACH MAINS HALF CYCLE, THIS THEN CHARGES C4 VIA THE NETWORK OF R6, R7 AND R8, WHEN THE VOLTAGE ON U4A INPUT REACHES ITS POSITIVE THRESHOLD LEVEL THEN ITS OUTPUT SWITCHES TO A LOW LEVEL. AT THE END OF THE PULSE D6 IS USED TO QUICKLY DISCHARGE C4 READY FOR THE NEXT HALF CYCLE, BY ADJUSTING R8 AND R7 THE TIME TAKEN TO TRIGGER U4A CAN BE VARIED AND THUS THE PERCENTAGE OF MAINS CYCLE PRESENTED TO THE MOTOR.

THE RECEIVER MODULE M1 IS A SIMPLE AM DETECTING RECEIVER WITH AN INTERGRATED DATA SEPARATOR TO PROVIDE A DIGITAL OUTPUT WHICH GOES POSITIVE WHEN CARRIER IS RECEIVED. THE DIGITAL OUTPUT IS TAKEN TO A MICROPROCESSOR, U3, AND THIS IS PROGRAMMED TO DECODE THE INCOMING DATA WAVEFORM AND COMPARE IT WITH THE SETTINGS ON DIL SWITCH SW1.

CONTINUATION OF DESCRIPTION OF SHAD RC2002  
RECEIVER:

ONCE TWO CORRECT CONSECUTIVE DATA WORDS ARE DETECTED THEN THE RA3 OUTPUT IS SWITCHED HIGH, THE INCOMING DATA IS THEN MONITORED AND PROVIDED THERE IS A CORRECTLY RECEIVED DATA WORD AT LEAST EVERY 250ms THEN THE OUTPUT REMAINS HIGH. THE SIGNAL FROM RA3 IS THEN TAKEN VIA R10 TO D8, TO GIVE A VISUAL INDICATION OF DATA RECEIVED, AND THEN TO THE LED POSITIVE SIDE OF OPTO-ISOLATOR U1. THIS PRODUCES AN AND FUNCTION WITH THE SIGNAL FROM U4A

AND CAUSES THE MAINS SIDE TRIAC TO BE TRIGGERED WHILE GOOD DATA IS BEING RECEIVED.

C1, R1 AND R2 FORM A SUPPRESSION CIRCUIT FOR THE DRIVER TRIAC IN U1, THE MAIN TRIAC; TR1 IS USED TO SUPPLY THE POWER TO THE MOTOR. TR1 IS A 'SNUBBER-LESS' TRIAC AND REQUIRES NO SUPPRESSION OF ITS OWN. THE PHASE CONTROLLED LIVE OUTPUT FROM TR1 IS TAKEN TO CN2 TO PROVIDE POWER TO THE MOTOR IN THE MACHINE.

R9 AND D7 PROVIDE AN INDICATOR TO SHOW WHEN MAINS POWER IS APPLIED TO THE UNIT. C10 AND C5 PROVIDE BYPASS FILTERING FOR THE 5-VOLT SUPPLY.



## CLAIMS

1. A SEWING MACHINE HAVING A MICROPROCESSOR CONTROLLED SWITCH AND A MANUAL MOTOR SPEED CONTROLLER PROVIDED INDEPENDENTLY ON THE MACHINE BODY, THE SEWING MACHINE BEING PROVIDED WITH A BATTERY POWERED RADIO TRANSMITTER TO OPERATE THE SWITCH REMOTELY AND AN ASSOCIATED RECEIVER ON THE BODY OF THE MACHINE, THE TRANSMITTER USING DIGITALLY CODED SIGNALS TO AVOID INTERFERENCE WITH OTHER REMOTELY CONTROLLED SEWING MACHINES IN THE VICINITY, THE TRANSMITTER HAVING A SINGLE CRYSTAL OR SAW DEVICE OSCILLATOR AND A MICROPROCESSOR WHICH GENERATES A PSEUNDO-RANDOMLY SPACED DATA STREAM, THE TRANSMITTER OPERATING WITH AMPLITUDE MODULATION, THE SWITCH BEING CONTROLLED SO AS TO STOP THE MACHINE IF THE STREAM OF DATA IS INTERRUPTED, THE TRANSMITTER HAVING A STRAP FOR ATTACHMENT TO AN OPERATOR, THE STRAP INCORPORATING A WIRE TO HELP WITH THE PROPAGATION OF THE TRANSMITTED SIGNAL, THE TRANSMITTER BEING ADAPTED TO BE PHYSICALLY CONNECTED TO A BOX HOUSING THE RECEIVER IN ORDER TO RECHARGE THE TRANSMITTER BATTERY, THE TRANSMITTER BEING DISABLED FROM OPERATING THE SWITCH WHILE ITS BATTERY IS BEING RECHARGED.

2. A SEWING MACHINE AS CLAIMED IN CLAIM 1 IN COMBINATION WITH A SECOND TRANSMITTER SO THAT ONE TRANSMITTER CAN BE USED WHILE THE OTHER IS BEING RECHARGED.

3. A SEWING MACHINE ACCORDING TO CLAIM 1 OR CLAIM 2 IN WHICH A BOX HOUSING THE TRANSMITTER HAS LEDs TO INDICATE OPERATING AND RECHARGING FUNCTIONS AND THE BOX OF THE RECEIVER HAS LEDs TO INDICATE POWER AND OPERATION AND ALSO HAS AN IEC MAINS CONNECTOR.

4. A SEWING MACHINE SUBSTANTIALLY AS HERIN DESCRIBED WITH REFERENCE TO THE DRAWINGS.

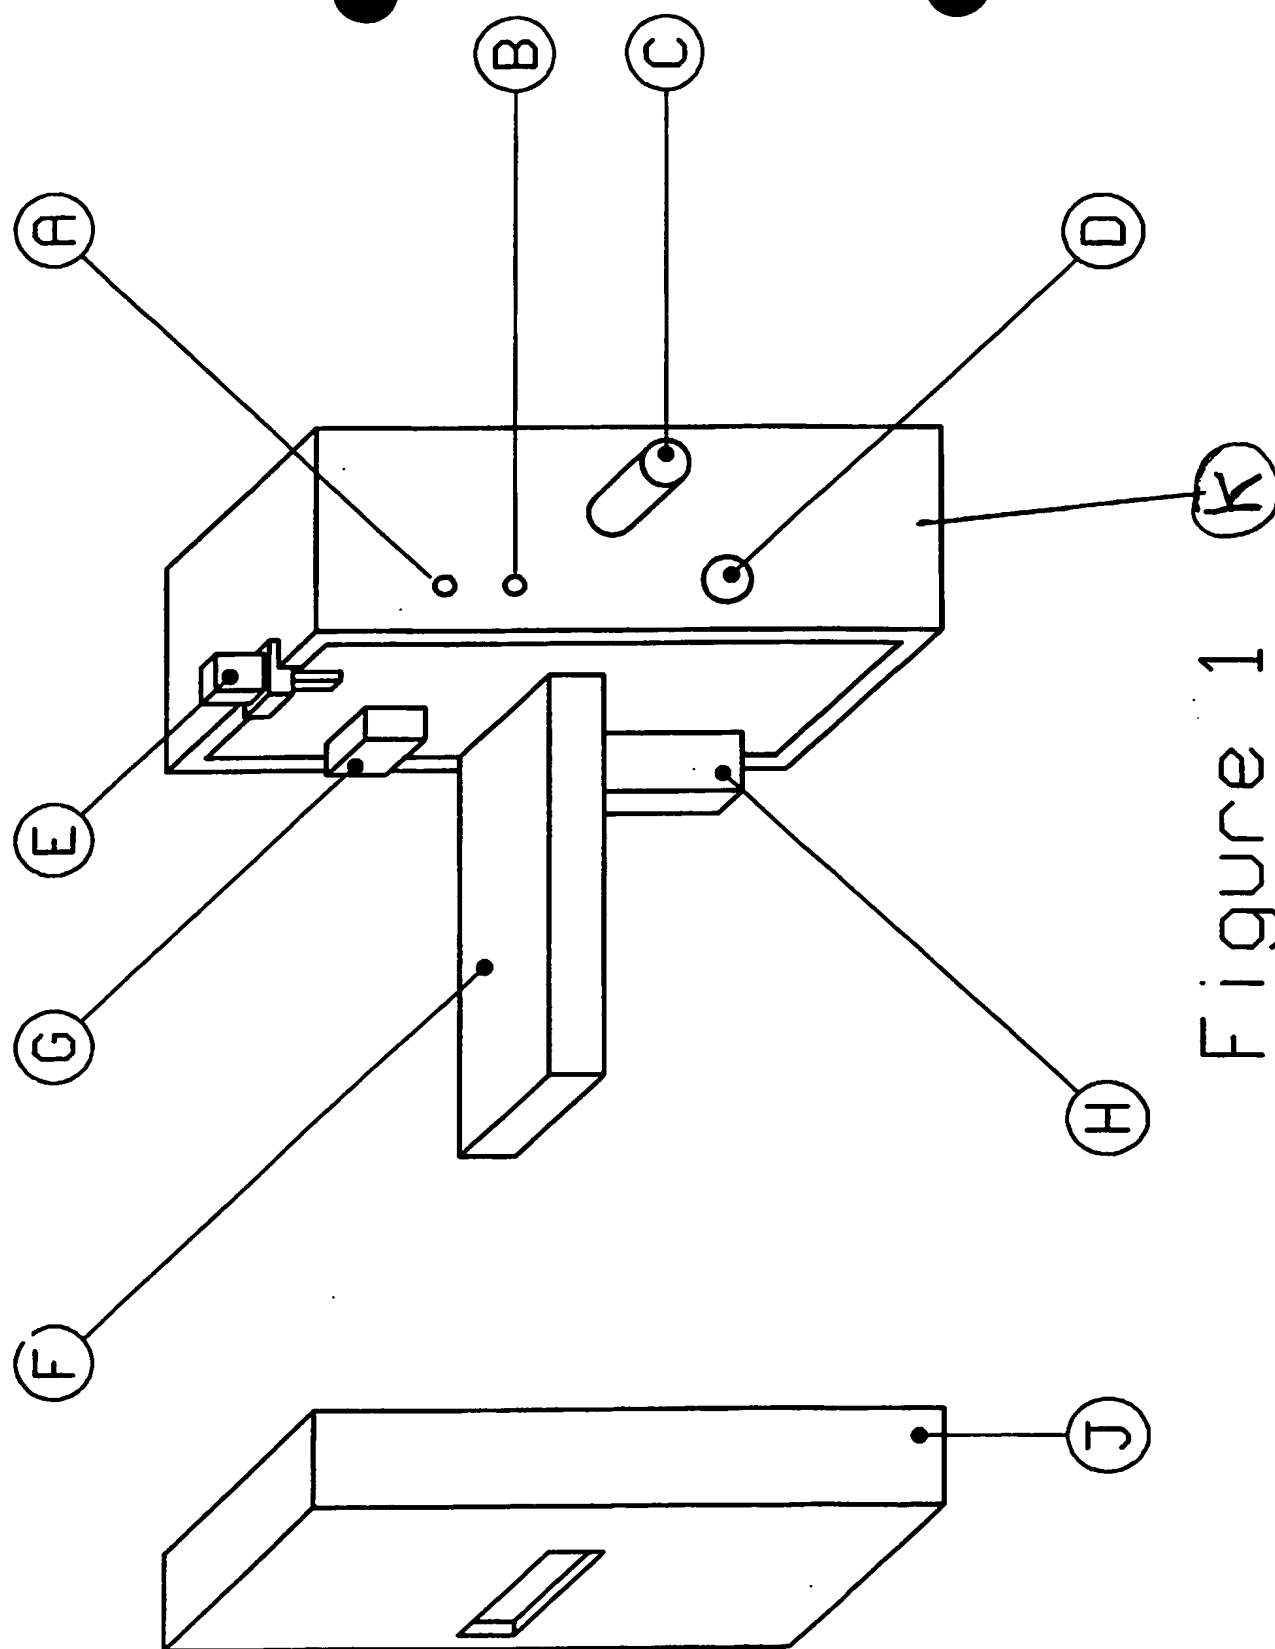


Figure 1

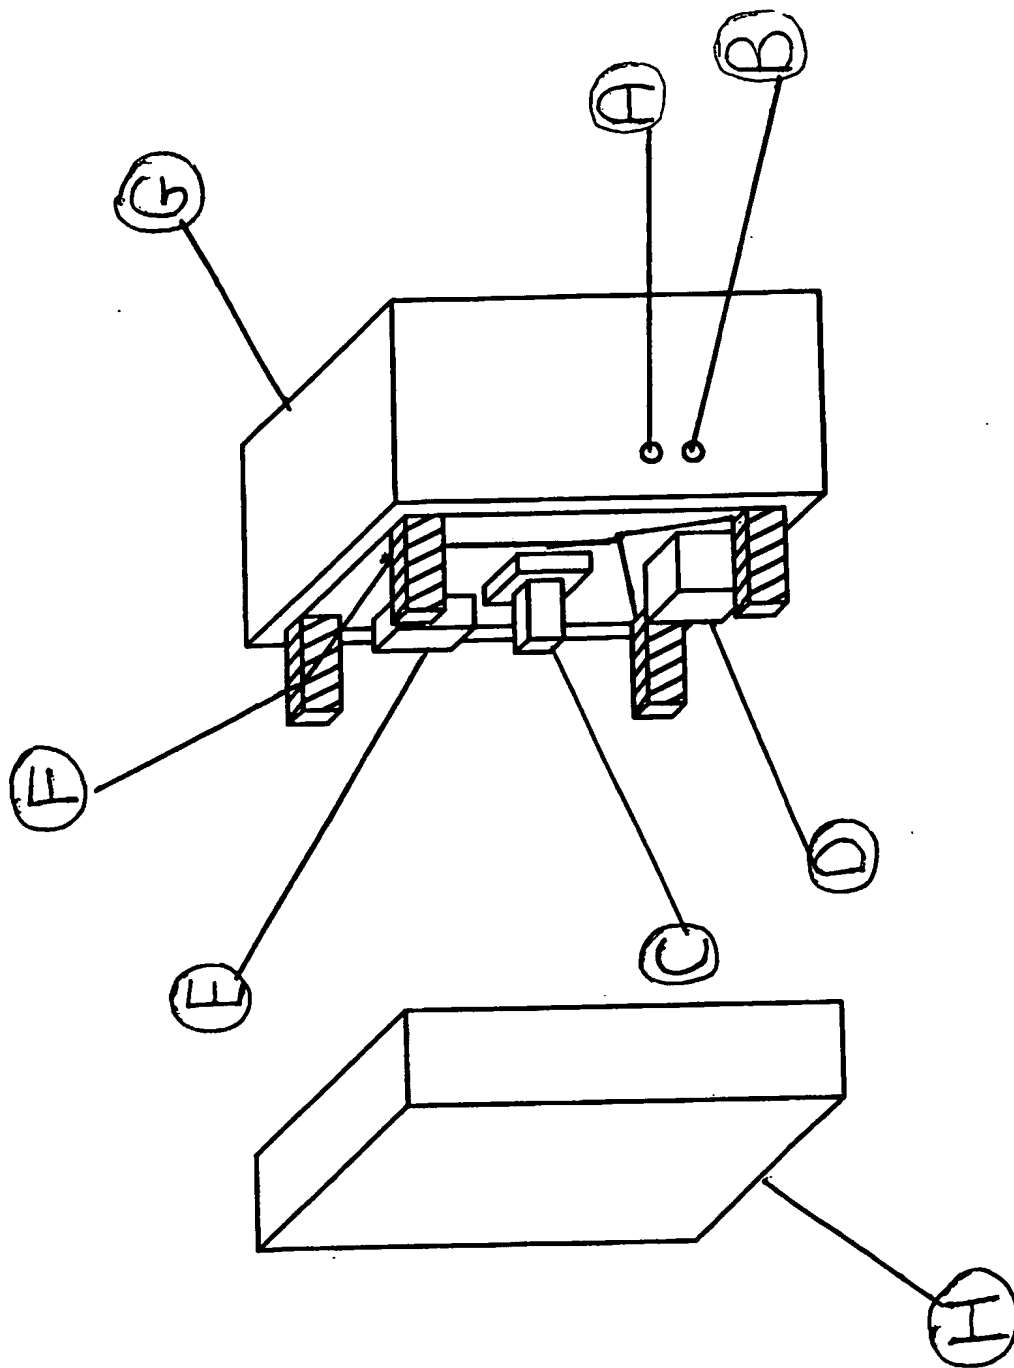


Figure 2

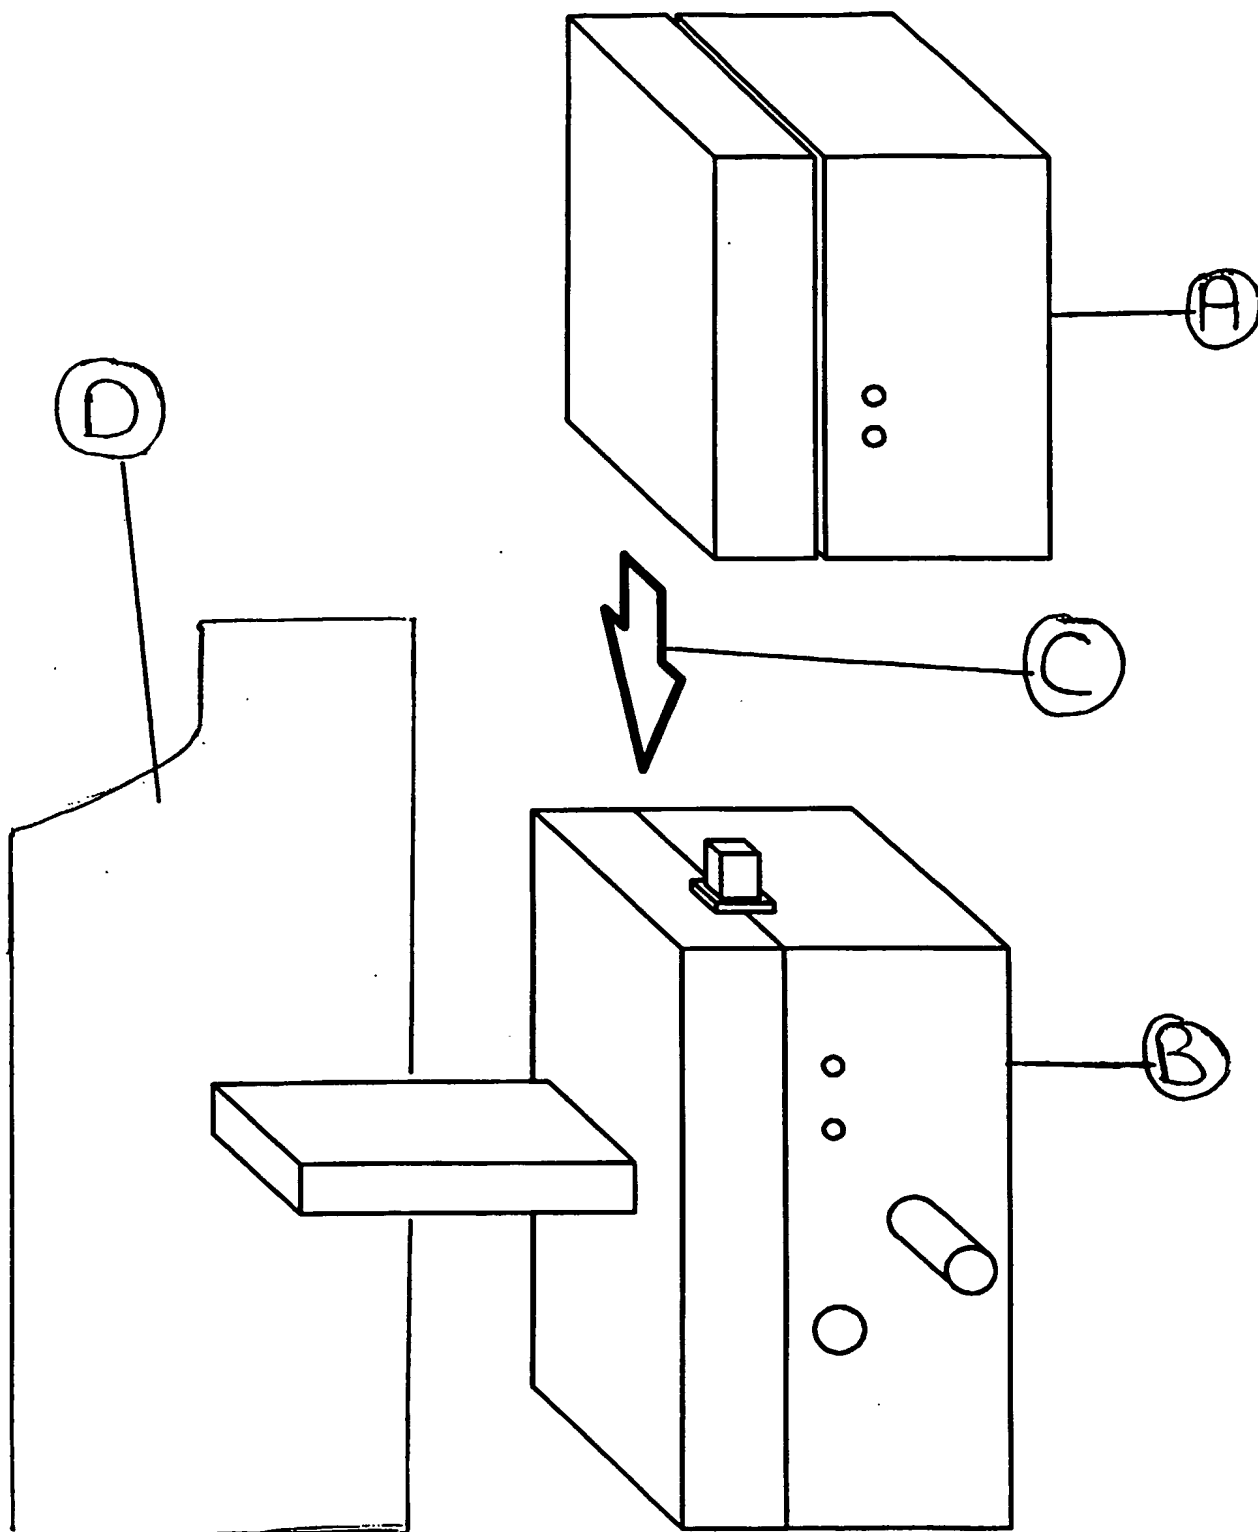


Figure 3

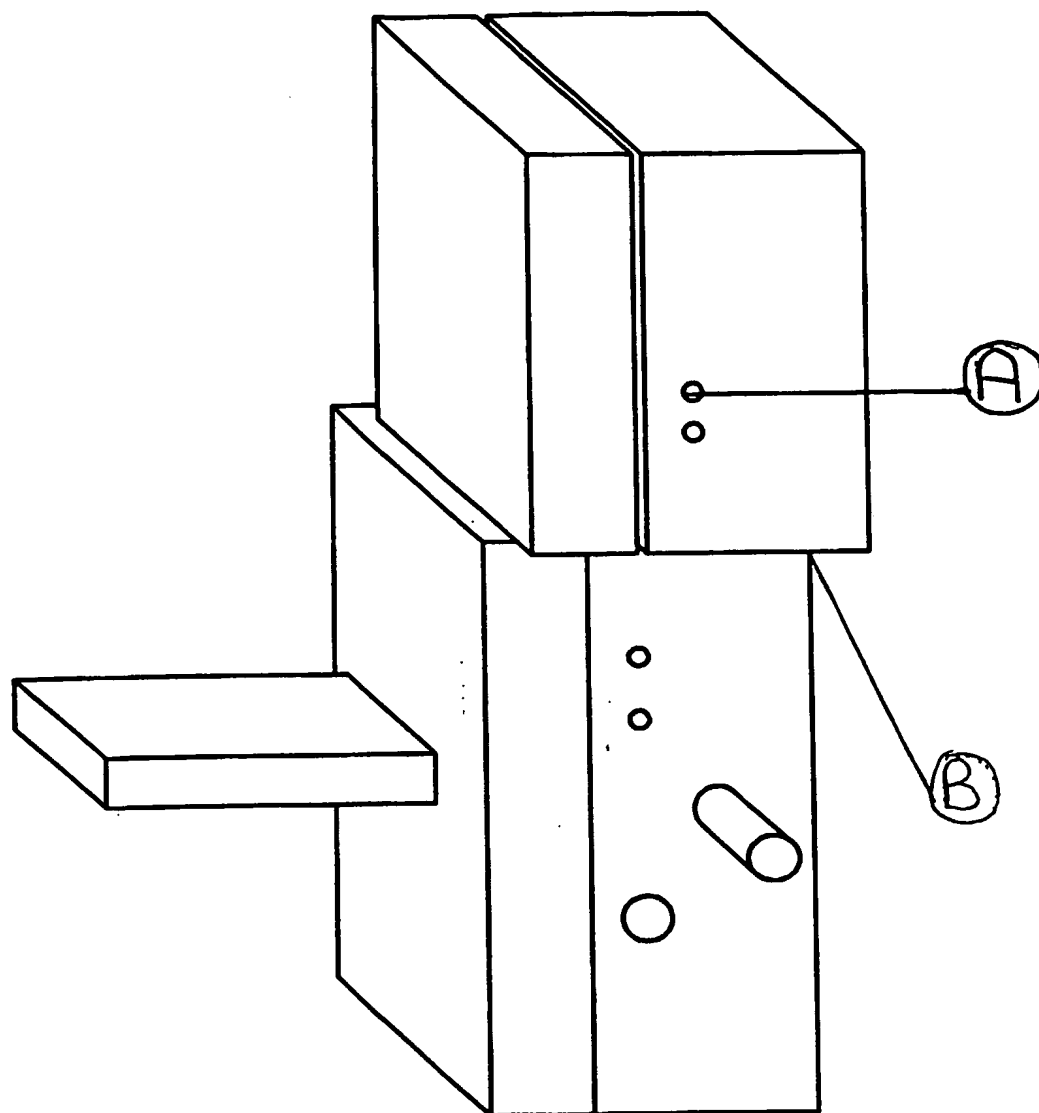


Figure 4

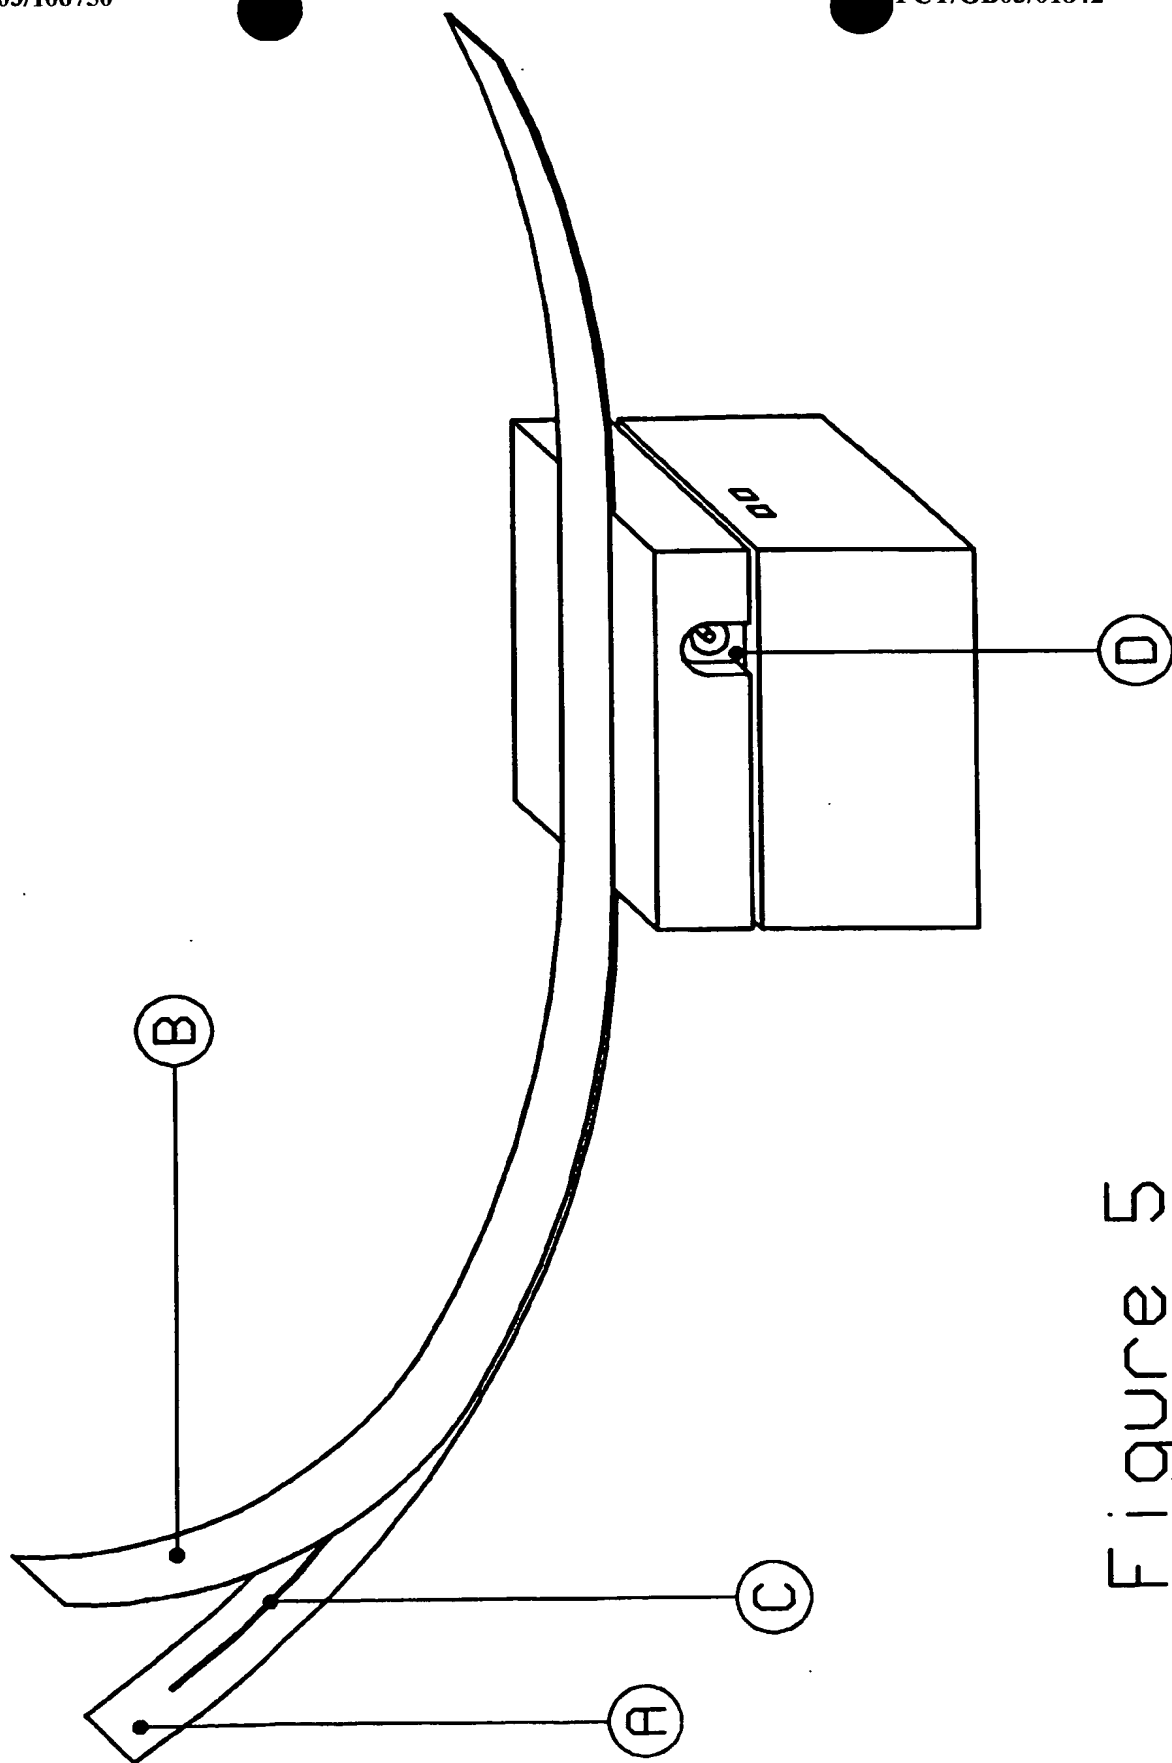


Figure 5



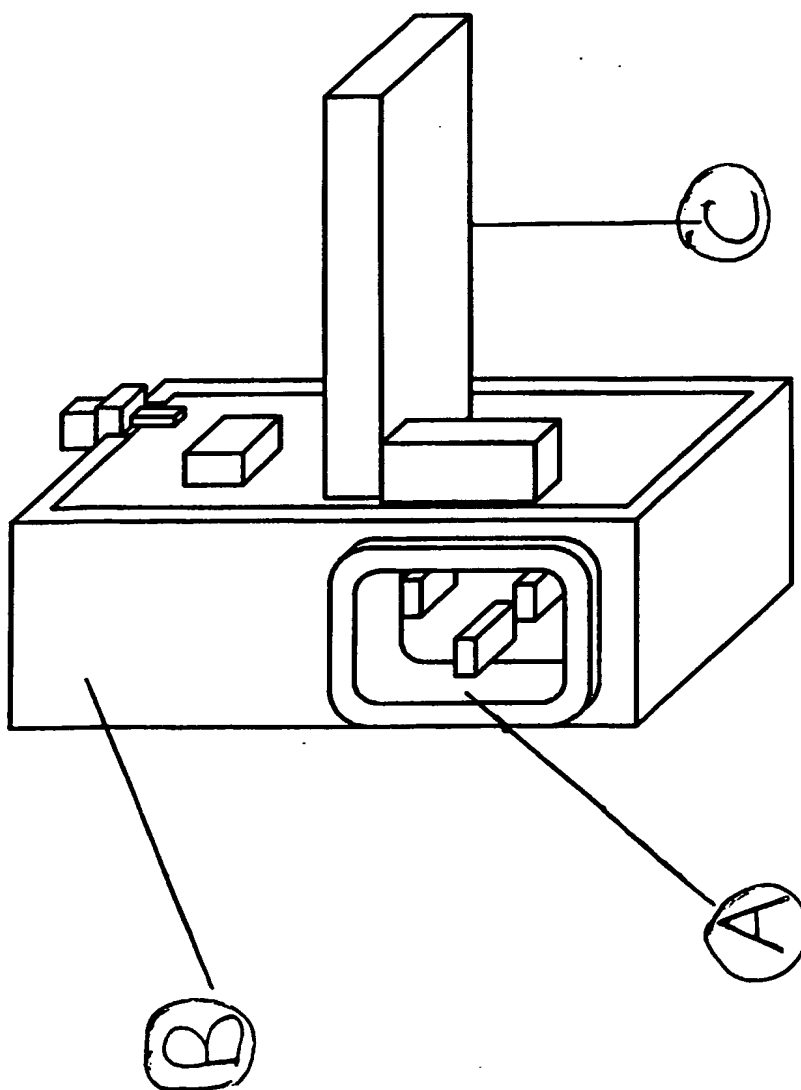


Figure 6



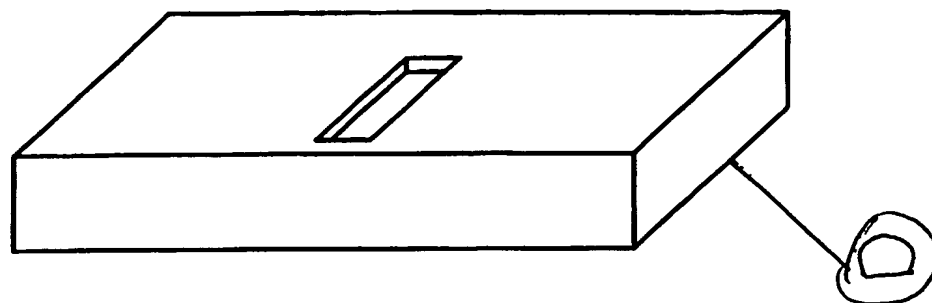

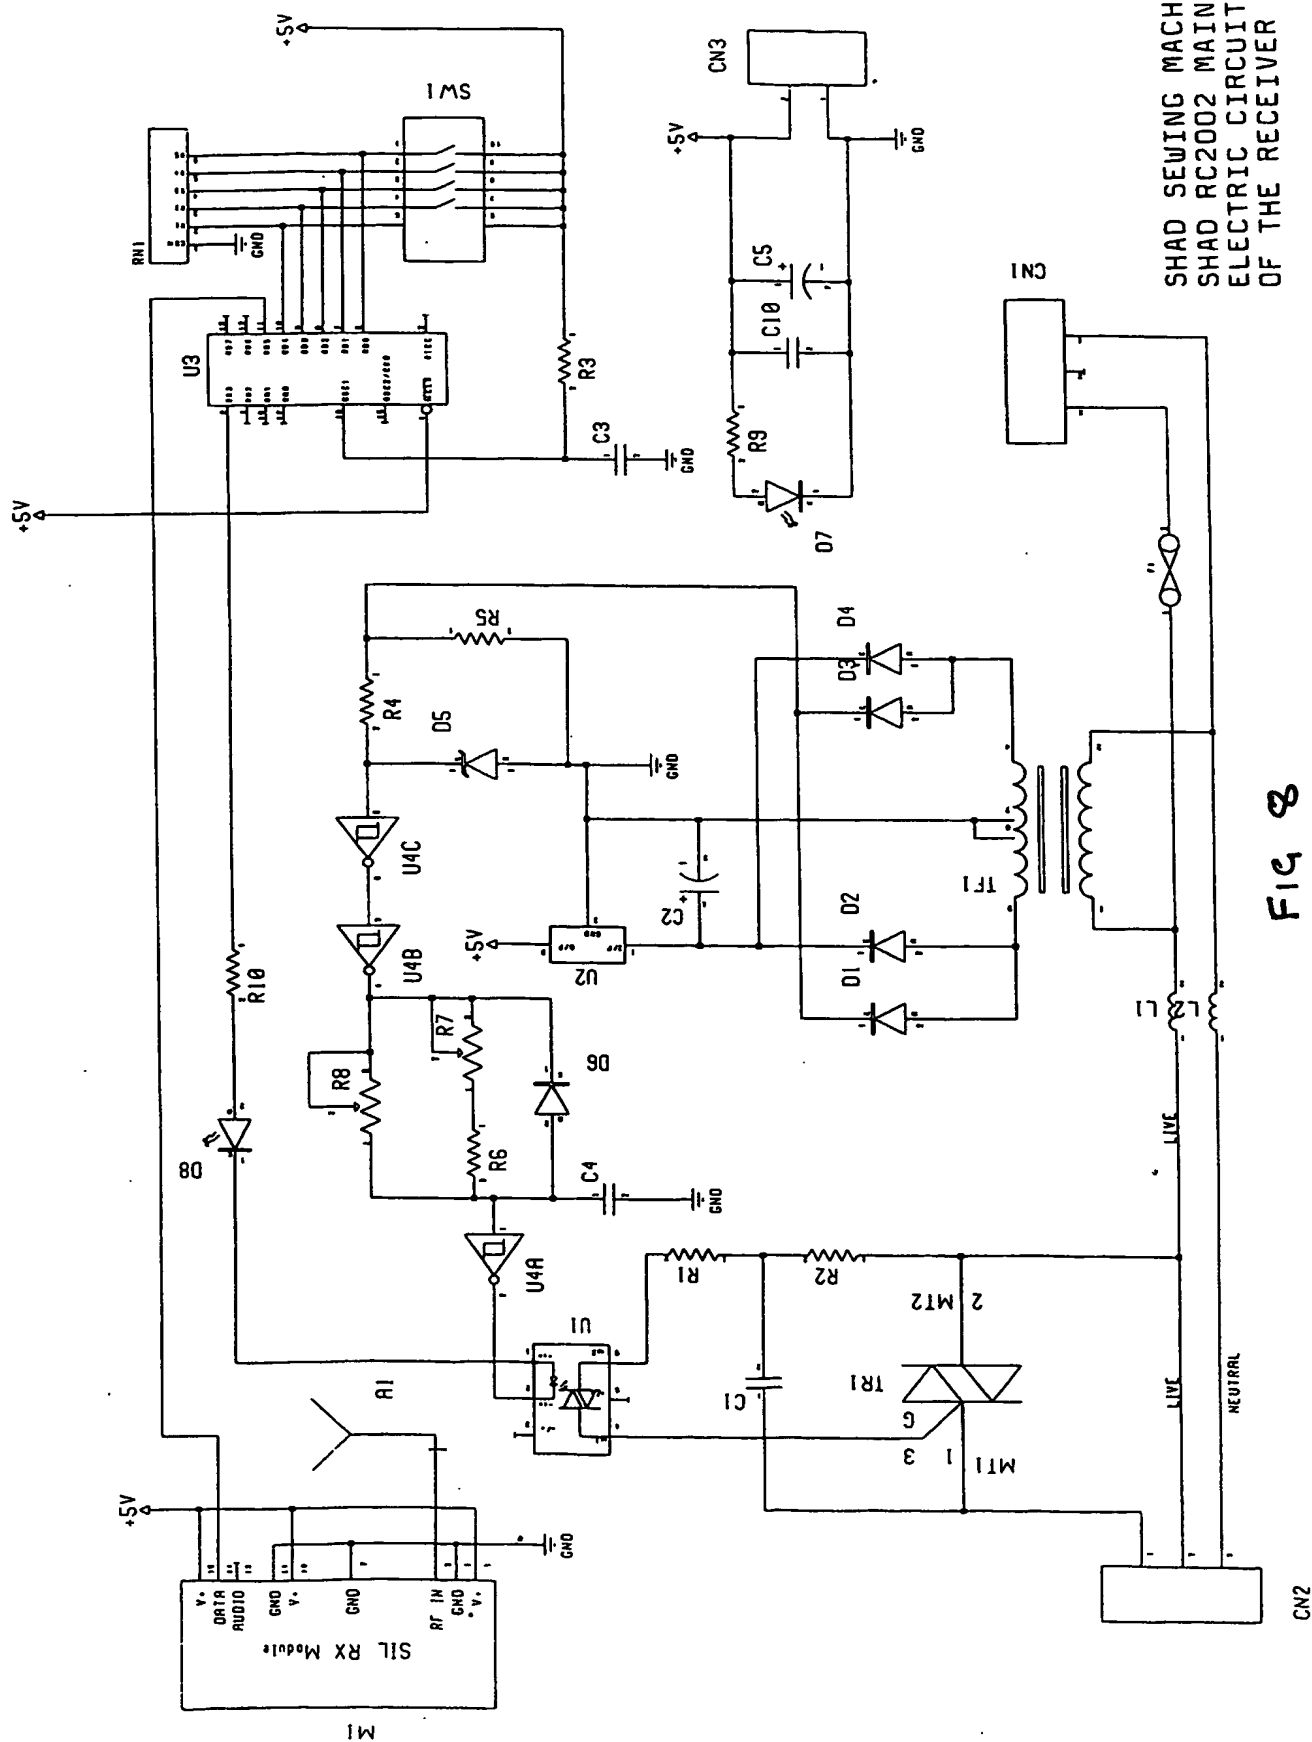

8  
F.V

SHAD SEWING MACHINES  
SHAD RC2002 MAIN  
ELECTRIC CIRCUIT  
OF THE RECEIVER

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 03/01842

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 D05B69/18

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 D05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 332 685 A (SHAD PHILIP) 30 June 1999 (1999-06-30) the whole document	1
A	US 5 247 449 A (YOSHIDA NORIYUKI) 21 September 1993 (1993-09-21) cited in the application the whole document	1
A	US 4 976 552 A (ISHIKAWA SATORU ET AL) 11 December 1990 (1990-12-11) cited in the application	
-/--		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

17 September 2003

Date of mailing of the international search report

24/09/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Debard, M

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 03/01842

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>PATENT ABSTRACTS OF JAPAN  vol. 008, no. 142 (E-254),  3 July 1984 (1984-07-03)  -&amp; JP 59 050792 A (RICCAR SEWING MACHINE  KK), 23 March 1984 (1984-03-23)  cited in the application</p> <p>-----</p>	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 03/01842

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2332685	A	30-06-1999	AT 229583 T AU 2539499 A DE 69904459 D1 EP 1068386 A1 WO 9951807 A1	15-12-2002 25-10-1999 23-01-2003 17-01-2001 14-10-1999
US 5247449	A	21-09-1993	JP 4144591 A	19-05-1992
US 4976552	A	11-12-1990	JP 1291892 A JP 2733769 B2	24-11-1989 30-03-1998
JP 59050792	A	23-03-1984	NONE	